
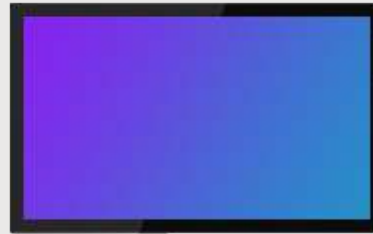


# K730 Series

## Build the product you need

The K730 series is our family of Panel PC products. All products are powered by the Ninja compute module. Choose from a range of screen sizes and configurations to build a product that works for your space.

From self checkouts to patient check-in devices, touch solutions for your kitchen management or a traditional POS, one of the many K-series configurations will step up to the challenge.



**K736**  
11.6"

**K737**  
15.6"

**K738**  
18.5"

**K739**  
21.5"



Protecting the planet together...



Committed to environmental care



Environmental Management compliance with ISO 14001



Community and Social Responsibility

# Here's the detail...

|                    |                       | K736  | K737               | K738               | K739               |
|--------------------|-----------------------|---|--------------------|--------------------|--------------------|
| <b>System</b>      | Processor             | Intel® Celeron J6412 / Intel® Core i3-1115G4 / Intel® Core i5-1135G7 / Android Qualcomm® Q660 |                    |                    |                    |
|                    | Memory                | 8GB DDR4 (Windows) / 4GB LPDDR4 (Android)   |                    |                    |                    |
|                    | Storage               | 128GB SSD M.2 (Windows) / 64GB eMMC (Android)   |                    |                    |                    |
|                    | Supported OS          | Windows 10 IoT Enterprise (64bit) / Android 9   |                    |                    |                    |
| <b>Display</b>     | Size & resolution     | 11.6" 1920 × 1080   | 15.6" 1920 × 1080  | 18.5" 1366 × 768   | 21.5" 1920 × 1080  |
|                    | Touch screen          | True-Flat PCAP multi-touch  |                    |                    |                    |
| <b>Audio</b>       | Speaker               | 1 × 3W  |                    |                    |                    |
| <b>Power</b>       | Power supply          | 65 / 120W 19V   |                    |                    |                    |
| <b>Certificate</b> | EMC & safety          | FCC Class A, CE Mark Class A, LVD   |                    |                    |                    |
| <b>Environment</b> | Operating temperature | 0°C ~ 35°C (32°F ~ 95°F)  |                    |                    |                    |
|                    | Storage temperature   | -20°C ~ 60°C (-4°F ~ 140°F)   |                    |                    |                    |
|                    | Humidity              | 20% ~ 85% RH non-condensing   |                    |                    |                    |
| <b>Dimensions</b>  | W x D x H             | 277 × 180.5 × 40.8mm  | 370 × 235 × 42.3mm | 453 × 273 × 50.2mm | 518 × 310 × 49.3mm |
|                    | Weight                | 1.4kg   | 3.0kg              | 4.4kg              | 5.3kg              |

PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE